
BADU JET TURBO PRO

# Zusatz-Kit BADU JET Turbo Pro für Wandstärke 18-27 mm

Article number 2325000403
Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/zusatz-kit-badu-jet-turbo-pro-fur-wandstarke-18-27-mm-2325000403

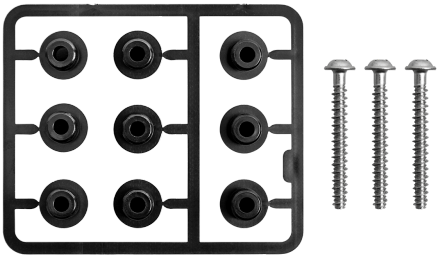

## Description

Innovation, performance, and elegant design combined. Welcome to the limit.

## Areas of use

For wall installation in all pool designs up to 7 mm thick, except round pools. For performance-oriented professional workouts, relaxation, rehabilitation training, fitness, or recreational fun.

## Version

A flush-mounted housing uses innovative propeller technology to draw water through the cover and return it to the pool in a powerful jet. The system is powered by an efficient, fanless, fully encapsulated permanent magnet motor. Power control and switching on and off are controlled via the integrated piezo buttons or a remote control.

## Material short text

Zusatz-Kit,Wandstärke 18-27,BJ Turbo Pro

## Technical data

### Hydraulic power

| | |
|---|---|
| Flow rate | 0 m³/h |

### Electrics

| | |
|---|---|
| Power input $P_1$ (max.) | 0 kW |
| Power output $P_2$ (max.) | 0 kW |

### General / Product features

| | |
|---|---|
| Product range | BADU Premium |

### Connections & piping

| | |
|---|---|
| Recommended suction line diameter | 0 mm |

| | |
|---|---|
| Recommended discharge line diameter | 0 mm |

### Nozzles & counter-current system

| | |
|---|---|
| Number of nozzles | 0 St |
| Nozzle swivels in all directions | 0 ° |
| Outlet pressure at the nozzle | 0 bar |
| Outlet velocity, centred 2 m in front of the nozzle | 0 m/s |
| Massage pressure max. | 0 bar |

### Operating conditions & water

| | |
|---|---|
| Ambient temperature (min.) | 0 ° C |
| Total salt concentration | 0 % |

## Dimensions & logistics

| | |
|---|---|
| Customs tariff number | 84799070 |