
BADU RESORT-PM

# BADU Resort 70-PM

Article number 2195708137

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-resort-70-pm-2195708137

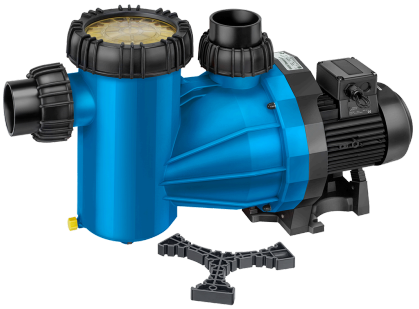

## Description

Synchronous drive for external control system. Efficient circulation pump for large pools.

## Areas of use

Swimming pool water circulation in filter systems, adjustable to a maximum of 3 m above or below the water level.

## Version

Close-coupled pump with integrated fiber catcher. Bellows mechanical seal mounted on a plastic impeller hub. The motor or pump shaft does not come into contact with the circulating water. Electrically isolated. Fiber catcher capacity approx. 10 l Suction screen mesh size approx. 3.4 x 3.2 mm

## Material short text

BADU Resort 70-PM, 3~, 3,00kW, blau

## Technical data

### Hydraulic power

| | |
|---|---|
| Flow rate | 70 m³/h |
| Head (min.) | 0 mWS |
| Operating pressure max. | 0 bar |

### Motor & drive

| | |
|---|---|
| Speed (max.) | 3,000 min-1 |
| Motor phases | 3~ |
| Degree of protection | IP 55 |
| Insulation class | F |

### Electrics

| | |
|---|---|
| Power input $P_1$ (max.) | 3.28 kW |
| Power output $P_2$ (max.) | 3 kW |
| Frequency | 50 Hz |

### Connections & piping

| | |
|---|---|
| Connection, inlet / suction side | 110 |
| Connection, discharge side | 110 |
| Recommended suction line diameter | 110 mm |
| Recommended discharge line diameter | 110 mm |

### Operating conditions & water

| | |
|---|---|
| Ambient temperature (min.) | 40 ° C |
| Total salt concentration | 5 g/l |

## Dimensions & logistics

| | |
|---|---|
| Product length | 0 mm |
| Customs tariff number | 84137051 |