
BADU BRONZE ECO VS WE.

# BADU Bronze Eco VS

| | |
|---|---|
| Article number | 2101022138 |
| GTIN/EAN | 4260673452049 |
| Product page | https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-bronze-eco-vs-2101022138 |

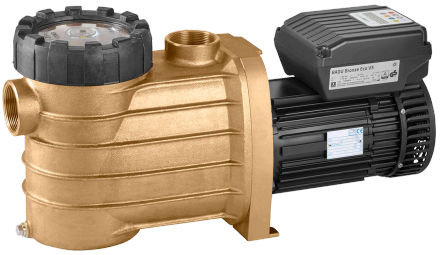

## Material short text

BADU Bronze Eco VS, 1~, 1,10 kW

## Technical data

### Hydraulic power

| | |
|---|---|
| Flow rate | 28 m³/h |
| Head (min.) | 21.9 mWS |

### Motor & drive

| | |
|---|---|
| Speed (max.) | 600 – 3,000 min-1 |
| Motor phases | 1~ |
| Degree of protection | IP 55 |
| Insulation class | F |

### Electrics

| | |
|---|---|
| Power input $P_1$ (max.) | 0.03 kW |
| Power output $P_2$ (max.) | 0.01 kW |
| Voltage (max.) | 1~ 230 V |
| Frequency | 50 Hz |

### General / Product features

| | |
|---|---|
| Certification | TÜV, Patent, Green |

### Filtration

| | |
|---|---|
| Lint catcher capacity | 3 l |

### Connections & piping

| | |
|---|---|
| Connection, inlet / suction side | 2 Rp |

| | |
|---|---|
| Connection, discharge side | 2 Rp |
| Recommended suction line diameter | 63 mm |
| Recommended discharge line diameter | 63 mm |

### Operating conditions & water

| | |
|---|---|
| Ambient temperature (min.) | 40 ° C |
| Total salt concentration | 5 g/l |

## Dimensions & logistics

| | |
|---|---|
| Product length | 557 mm |
| Net weight | 25.5 kg |
| Customs tariff number | 84137051 |