
BADU GAMMA

# BADU Gamma 20

| | |
|---|---|
| Article number | 2105200037 |
| GTIN/EAN | 4260673451417 |
| Product page | https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-gamma-20-2105200037 |

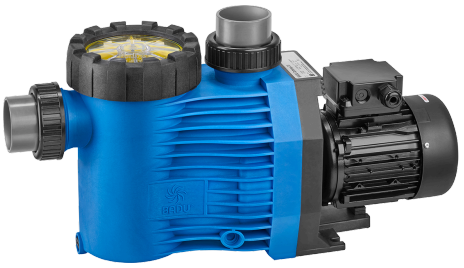

## Description

The new bestseller after our BADU Prime Equipped with internal and external thread Efficient, modern, well thought out

## Areas of use

Swimming pool water circulation in filter systems, can be installed max. 3 m above or below the water level

## Version

Close-coupled pump with integrated fiber catcher. Bellows mechanical seal mounted on a plastic impeller hub. The motor or pump shaft does not come into contact with the circulating water. Electrically isolated. Fiber catcher capacity approx. 3 l Suction screen mesh size approx. 3.2 x 2.6 mm

## Material short text

BADU Gamma 20, 3~, 0,75 kW, blau

## Technical data

### Hydraulic power

| | |
|---|---|
| Flow rate | 20 m³/h |
| Head (min.) | 15.3 mWS |

### Motor & drive

| | |
|---|---|
| Speed (max.) | 2,840 min-1 |
| Motor phases | 3~ |
| Degree of protection | IP 55 |
| Insulation class | F |

### Electrics

| | |
|---|---|
| Power input $P_1$ (max.) | 0.9 kW |

| | |
|---|---|
| Power output $P_2$ (max.) | 0.75 kW |
| Voltage (max.) | 3~ Y/Δ 400/230 V |
| Frequency | 50 Hz |

**Energy efficiency**

| | |
|---|---|
| Energy efficiency class | D |

**General / Product features**

| | |
|---|---|
| Certification | TÜV |

**Filtration**

| | |
|---|---|
| Lint catcher capacity | 3 l |

**Connections & piping**

| | |
|---|---|
| Connection, inlet / suction side | 63 mm / 2 Rp |
| Connection, discharge side | 63 mm / 2 Rp |
| Recommended suction line diameter | 63 mm |
| Recommended discharge line diameter | 63 mm |

**Operating conditions & water**

| | |
|---|---|
| Ambient temperature (min.) | 40 ° C |
| Total salt concentration | 5 g/l |

## Dimensions & logistics

| | |
|---|---|
| Product length | 547 mm |
| Net weight | 12.8 kg |
| Customs tariff number | 84137051 |