
BLULINE

VG 30 BL

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/vg-30-bl-p50708

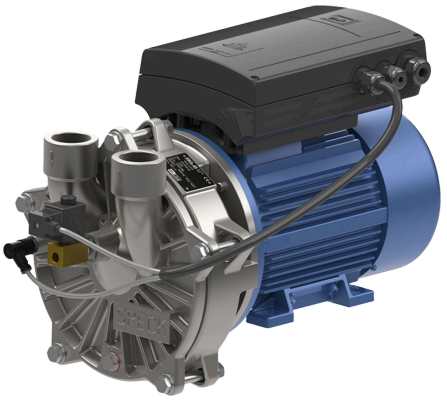

Description

Liquid ring vacuum pump of the VG series with frequency converter for highly efficient, demand-based vacuum generation including sensors and control unit, without valve technology for dead-space-free conveying.

Areas of use

Plastics processing: Our pumps support wet and dry calibration of plastic profiles as well as extruder compounding.

Technical data

Hydraulic power

Suction pressure	83 mbar

Motor & drive

Degree of protection	IP 55

Electrics

Power output P_2 (max.)	0.75 kW
Input voltage	400 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Connections & piping

Connection, inlet / suction side	G 1 1/2"
Connection, discharge side	G 1 1/2"

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84141089