
BLUVAC DEZENTRAL

VG - BVD + ME 90 BVD

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/vg-bvd-me-90-bvd-p50713

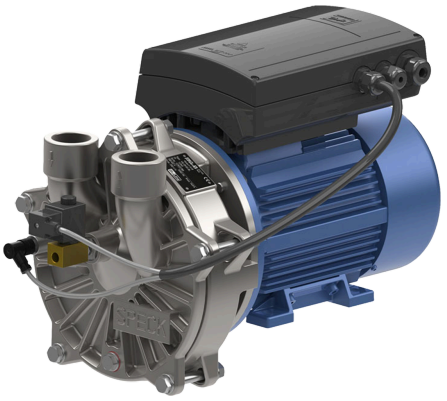

Technical data

Hydraulic power

Suction pressure	83 mbar

Motor & drive

Degree of protection	IP 55

Electrics

Power output P_2 (max.)	0.75 kW
Input voltage	400 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Connections & piping

Connection, inlet / suction side	G 1 1/2" + G 1"
Connection, discharge side	G 1 1/2" + G 1"

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84141089 + 84137051