
DS MK

DS 360 MK

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/ds-360-mk-p50827

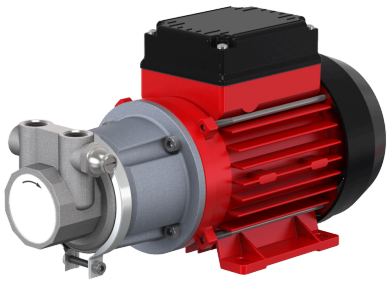

Description

Self-priming, magnetically coupled rotary vane pumps with a relatively constant flow rate at operating pressures up to 14 bar, equipped with an integrated overflow valve to protect sensitive system components.

Areas of use

>Reverse osmosis systems: Constant supply for water treatment processes. >Industrial spray applications: Precise and reliable delivery for effective industrial cooling.

Technical data

Hydraulic power

Flow rate	5.9 l/min
Head (min.)	81.577 mWS

Motor & drive

Speed (max.)	2,800 min-1
Degree of protection	IP 54

Electrics

Power output P_2 (max.)	0.3 kW
Frequency	50 Hz

Connections & piping

Connection, inlet / suction side	G 3/8"
Connection, discharge side	G 3/8"

Dimensions & logistics

Customs tariff number	84136061