
DS MK

# DS 960 MK

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/ds-960-mk-p50831

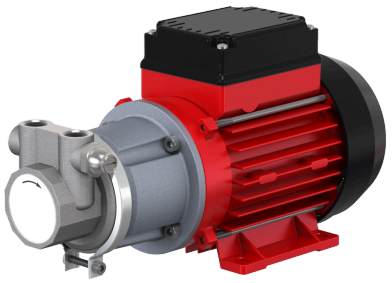

## Description

Self-priming, magnetically coupled rotary vane pumps with a relatively constant flow rate at operating pressures up to 14 bar, equipped with an integrated overflow valve to protect sensitive system components.

## Areas of use

>Reverse osmosis systems: Constant supply for water treatment processes. >Industrial spray applications: Precise and reliable delivery for effective industrial cooling.

## Technical data

### Hydraulic power

| | |
|---|---|
| Flow rate | 15.8 l/min |
| Head (min.) | 142.76 mWS |

### Motor & drive

| | |
|---|---|
| Speed (max.) | 1,450 min-1 |
| Degree of protection | IP 54 |

### Electrics

| | |
|---|---|
| Power output $P_2$ (max.) | 0.75 kW |
| Frequency | 50 Hz |

### Connections & piping

| | |
|---|---|
| Connection, inlet / suction side | G1/2" |
| Connection, discharge side | G1/2" |

## Dimensions & logistics

| | |
|---|---|
| Customs tariff number | 84136061 |