
TOEGN / TOEGA

TOEGN065160 - TOEGA065160

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/toegn065160-toega065160-p50969

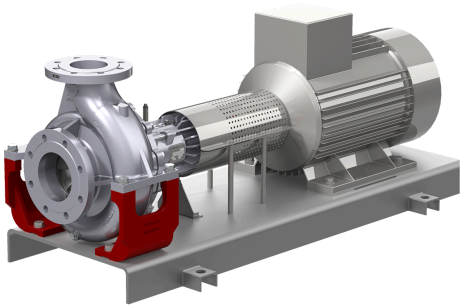

Description

Heat transfer pump with mechanical seal, suitable for oil applications up to 350 °C. The robust design ensures a long service life and minimal maintenance, enabling reliable sealing even at high temperatures and demanding operating conditions.

Areas of use

>Heating systems: Our pumps ensure efficient and reliable heating. >Industrial temperature control systems: They ensure precise temperature control in industrial processes.

Technical data

Hydraulic power

Flow rate	150 m³/h
Head (min.)	43 mWS
Operating pressure max.	16 bar

Motor & drive

Speed (max.)	1.45 – 2.9 min-1
Degree of protection	IP 55

Electrics

Power output P_2 (max.)	22 kW
Input voltage	400 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Connections & piping

Connection, inlet / suction side	DN 80

Connection, discharge side	DN 65

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137059