
MY MK

MY 2-8000 MK

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/my-2-8000-mk-p50978

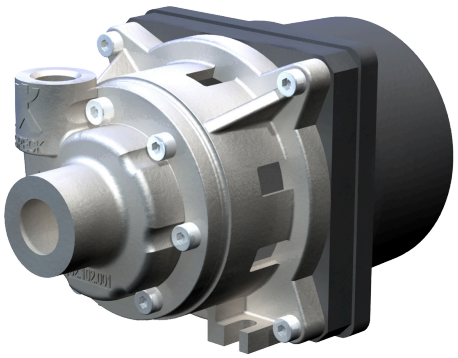

Description

Very compact, non-self-priming, magnetically coupled radial impeller pumps with the latest motor technology, ideal for leak-free operation.

Sales text

MY 2-8000 MK

Areas of use

> Cooling circuits: Our pumps ensure reliable cooling in a variety of applications. > Temperature controls: They ensure precise and efficient temperature control.

Technical data

Hydraulic power

Flow rate	29 l/min
Head (min.)	15 mWS
Operating pressure max.	15 mWS

Motor & drive

Speed (max.)	8,000 min-1
Motor phases	Gleichstrom

Electrics

Input voltage	24 V
Frequency	50 Hz

Connections & piping

Connection, inlet / suction side	G 1/4"
Connection, discharge side	G 3/8"

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137059