
Y MK

Y 2951 W MM

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/y-2951-w-mm-p50980

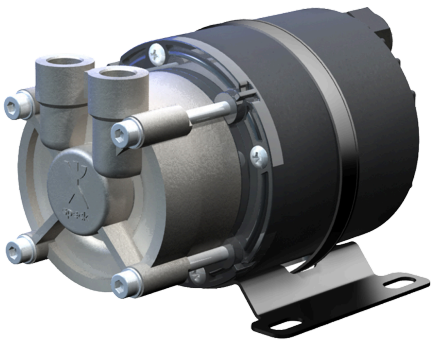

Description

Non-self-priming peripheral impeller pumps with the latest motor technology, designed as a canned motor, are maintenance-free and can be parameterized for various speeds. Speed control via control signals is also possible.

Sales text

Y 2951 W MM

Areas of use

> Cooling circuits: Our pumps ensure reliable cooling in a variety of applications. > Temperature controls: They ensure precise and efficient temperature control.

Technical data

Hydraulic power

Flow rate	45 l/min
Head (min.)	18 mWS
Operating pressure max.	18 mWS

Motor & drive

Speed (max.)	2,000 – 5,000 min-1
Motor phases	Gleichstrom
Degree of protection	IP 54

Electrics

Input voltage	24 V

Connections & piping

Connection, inlet / suction side	G 1/4"
Connection, discharge side	G 1/4"

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137035