
CY MK

CY 6091 MK TOE

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/cy-6091-mk-toe-p50984

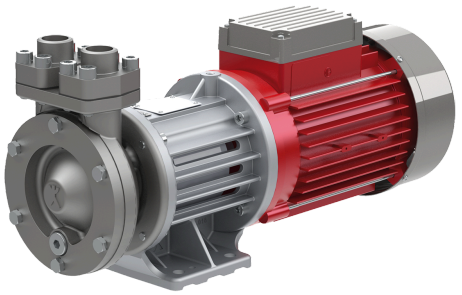

Description

Non-self-priming peripheral impeller pumps with magnetic coupling are characterized by high pressure at low flow rates and a compact design. Thanks to the magnetic coupling, they are leak-free and maintenance-free.

Sales text

CY 6091 MK TOE

Areas of use

> Cooling circuits: Our pumps ensure reliable cooling in a variety of applications. > Temperature controls: They ensure precise and efficient temperature control.

Technical data

Hydraulic power

Flow rate	200 l/min
Head (min.)	83 mWS
Operating pressure max.	83 mWS

Motor & drive

Speed (max.)	2,800 min-1
Motor phases	3~
Degree of protection	IP 54

Electrics

Power output P_2 (max.)	5.5 kW
Input voltage	230 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Connections & piping

Connection, inlet / suction side	G 3/4" / SAE 1" / SAE 1 1/4"
Connection, discharge side	G 3/4" / SAE 1" / SAE 1 1/4"

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137045