
YS

# YS 2951

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/ys-2951-p50991

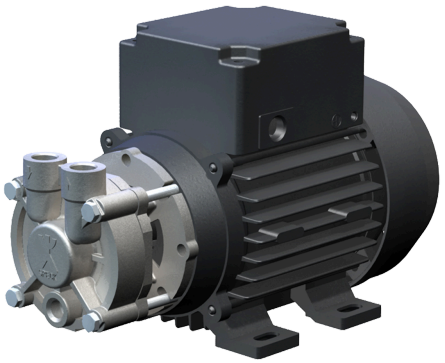

## Description

Self-priming peripheral impeller pumps offer high pressure at low flow rates and impress with their compact design. They are available with a mechanical seal for reliable and low-maintenance operation.

## Sales text

YS 2951

## Areas of use

> Cooling circuits: Our pumps ensure reliable cooling in a variety of applications. > Temperature controls: They ensure precise and efficient temperature control.

## Technical data

### Hydraulic power

| | |
|---|---|
| Head (min.) | 38 mWS |
| Operating pressure max. | 38 mWS |

### Motor & drive

| | |
|---|---|
| Speed (max.) | 2,800 min-1 |
| Degree of protection | IP 54 |

### Electrics

| | |
|---|---|
| Power output $P_2$ (max.) | 0.25 kW |
| Input voltage | 230 V |
| Frequency | 50 Hz |

### Connections & piping

| | |
|---|---|
| Connection, inlet / suction side | G 1/4" |
| Connection, discharge side | G 1/4" |

### Operating conditions & water

| | |
|---|---|
| Ambient temperature (min.) | 40 ° C |

## Dimensions & logistics

| | |
|---|---|
| Customs tariff number | 84137035 |