
NPY

# NPY 2051-S

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/npy-2051-s-p50995

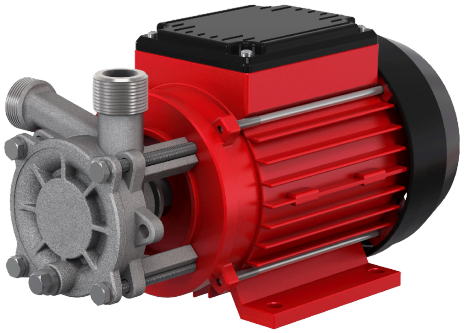

## Description

Self-priming peripheral impeller pumps offer high pressure at low flow rates and impress with their compact design. They are available with a mechanical seal for reliable and low-maintenance operation.

## Sales text

NPY 2051-S

## Areas of use

> Cooling circuits: Our pumps ensure reliable cooling in a variety of applications. > Temperature controls: They ensure precise and efficient temperature control.

## Technical data

### Hydraulic power

| | |
|---|---|
| Flow rate | 18 l/min |
| Head (min.) | 47 mWS |
| Operating pressure max. | 47 mWS |

### Motor & drive

| | |
|---|---|
| Speed (max.) | 2,800 min-1 |
| Degree of protection | IP 54 |

### Electrics

| | |
|---|---|
| Power output $P_2$ (max.) | 0.5 kW |
| Input voltage | 230 V |
| Frequency | 50 Hz |

### Energy efficiency

| | |
|---|---|
| Energy efficiency class | IE3 |

### Connections & piping

| | |
|---|---|
| Connection, inlet / suction side | G 3/4" A |
| Connection, discharge side | G 3/4" A |

### Operating conditions & water

| | |
|---|---|
| Ambient temperature (min.) | 40 ° C |

## Dimensions & logistics

| | |
|---|---|
| Customs tariff number | 84137035 |