
NPY

NPY 2051

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/npy-2051-p51000

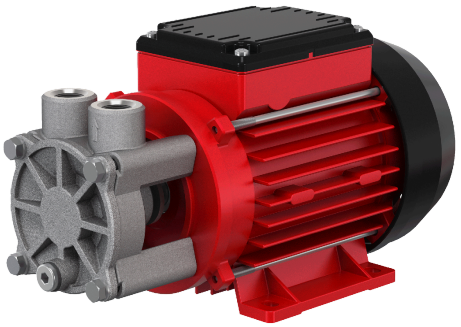

Description

Non-self-priming peripheral impeller pumps offer high pressure at low flow rates and impress with their compact design. They are available with a mechanical seal for reliable and low-maintenance operation.

Sales text

NPY 2051

Areas of use

> Cooling circuits: Our pumps ensure reliable cooling in a variety of applications. > Temperature controls: They ensure precise and efficient temperature control.

Technical data

Hydraulic power

Flow rate	30 l/min
Head (min.)	52 mWS
Operating pressure max.	52 mWS

Motor & drive

Speed (max.)	2,800 min-1
Degree of protection	IP 54

Electrics

Power output P_2 (max.)	0.5 kW
Input voltage	230 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Connections & piping

Connection, inlet / suction side	G 3/8" / G 1/2"
Connection, discharge side	G 3/8" / G 1/2"

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137035