
CY

CY 5091

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/cy-5091-p51002

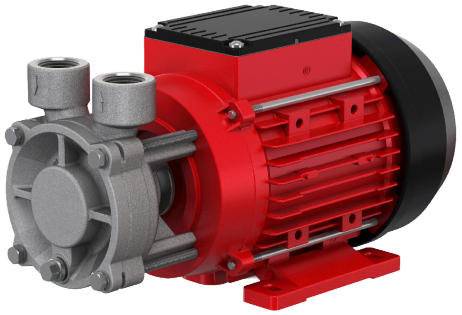

Description

Non-self-priming peripheral impeller pumps offer high pressure at low flow rates and impress with their compact design. They are available with a mechanical seal for reliable and low-maintenance operation.

Sales text

CY 5091

Areas of use

> Cooling circuits: Our pumps ensure reliable cooling in various applications. > Make-up systems: They ensure efficient and precise make-up of water-like liquids.

Technical data

Hydraulic power

Flow rate	100 l/min
Head (min.)	60 mWS
Operating pressure max.	60 mWS

Motor & drive

Speed (max.)	2,800 min-1
Motor phases	3~
Degree of protection	IP 54

Electrics

Power output P_2 (max.)	2.8 kW
Input voltage	230 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Connections & piping

Connection, inlet / suction side	SAE1
Connection, discharge side	SAE 1

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137045