
BADU JET TURBO SALT

BADU JET Turbo salt

Article number 2328170000

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-jet-turbo-salt-2328170000

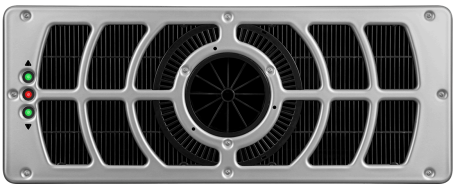

Description

Innovative technology combined with elegant design. Perfect for recreational and leisure swimmers.

Areas of use

Thermal water, thermal brine, and various problematic media, after checking their components and concentration. For wall installation in all pool designs up to 7 mm thick, except round pools. For performance-oriented workouts, relaxation, rehabilitation training, fitness, or leisure fun with the whole family. For an endless swimming experience without turning around.

Version

A flush-mounted housing uses innovative propeller technology to draw water through the cover and return it to the pool in a powerful jet. The system is powered by an efficient, fanless, fully encapsulated permanent magnet motor. Power control and switching on and off are controlled via the integrated piezo buttons or a remote control.

Material short text

BJ Turbo salt, Montagesatz

Technical data

Hydraulic power

Flow rate	125 – 245 m³/h

Electrics

Power input P_1 (max.)	1.2 kW
Power output P_2 (max.)	0 kW
Voltage (max.)	1~ 200-240 V

General / Product features

Product range	BADU Premium

Connections & piping

Recommended suction line diameter	0 mm
Recommended discharge line diameter	0 mm

Nozzles & counter-current system

Number of nozzles	1 St
Nozzle swivels in all directions	5 °
Outlet pressure at the nozzle	0 bar
Outlet velocity, centred 2 m in front of the nozzle	3 m/s
Massage pressure max.	0 bar

Operating conditions & water

Ambient temperature (min.)	0 ° C
Total salt concentration	0 %

Dimensions & logistics

Customs tariff number	84798997