
BADU JET TURBO PRO SALT

BADU JET Turbo Pro salt Standard-Montagesatz

Article number 2325170000
Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-jet-turbo-pro-salt-standard-montagesatz-2325170000

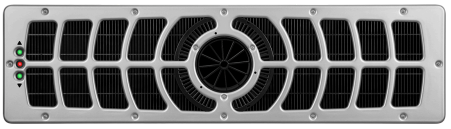

Description

Innovation, performance, and elegant design combined. Welcome to the limit.

Areas of use

Thermal water, thermal brine, and various problematic media after checking their components and concentration. For wall installation in all pool designs up to a wall thickness of 7 mm, except round pools. For performance-oriented professional workouts, relaxation, rehabilitation training, fitness, or recreational fun.

Version

A flush-mounted housing uses innovative propeller technology to draw water through the cover and return it to the pool in a powerful jet. The system is powered by an efficient, fanless, fully encapsulated permanent magnet motor. Power control and switching on and off are controlled via the integrated piezo buttons or a remote control.

Material short text

BJ Turbo Pro salt, Montagesatz

Technical data

Hydraulic power

Flow rate	150 – 350 m³/h

Electrics

Power input P_1 (max.)	2.75 kW
Power output P_2 (max.)	0 kW
Voltage (max.)	3~ 380-480 V

General / Product features

Product range	BADU Premium

Connections & piping

Recommended suction line diameter	0 mm
Recommended discharge line diameter	0 mm

Nozzles & counter-current system

Number of nozzles	1 St
Nozzle swivels in all directions	5 °
Outlet pressure at the nozzle	0 bar
Outlet velocity, centred 2 m in front of the nozzle	4.1 m/s
Massage pressure max.	0 bar

Operating conditions & water

Ambient temperature (min.)	0 ° C
Total salt concentration	0 %

Dimensions & logistics

Customs tariff number	84798997