
BADU 21-41

BADU 21-41/66H G

Article number 2341660337

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-21-41-66h-g-2341660337

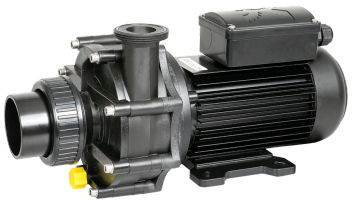

Description

Connection variant of the universal circulation pump BADU 21-40/6. For tubs and pools, countercurrent systems, and pool cleaning devices.

Areas of use

As a jet pump for bathtubs and counter-current systems, whirlpools, massage devices, air conditioning systems and cleaning devices up to 30 m³/h flow rate.

Version

Close-coupled pump with bellows mechanical seal, mounted on a plastic impeller hub. The motor or pump shaft does not come into contact with the circulating water. Electrically isolated. The discharge port can be rotated 90° in increments. Can also be used vertically with the pump at the bottom. Self-draining when installed vertically.

Material short text

BADU 21-41/66H G, 3~, 1,10 kW

Technical data

Hydraulic power

Flow rate	19 m³/h
Head (min.)	0 – 21 mWS
Operating pressure max.	2.5 bar

Motor & drive

Speed (max.)	2,850 min-1
Motor phases	3~
Degree of protection	IP 55
Insulation class	F

Electrics

Power input P_1 (max.)	1.5 kW
Power output P_2 (max.)	1.1 kW
Voltage (max.)	3~ 400/230 V
Frequency	50 Hz

Filtration

Lint catcher capacity	0 l

Connections & piping

Connection, inlet / suction side	63 G
Connection, discharge side	2 G
Recommended suction line diameter	63 mm
Recommended discharge line diameter	63 mm

Operating conditions & water

Ambient temperature (min.)	40 ° C
Total salt concentration	5 g/l

Dimensions & logistics

Product length	381 mm
Product width	0 mm
Product height	0 mm
Net weight	12.9 kg
Customs tariff number	84137051