
BADU JET TURBO

BADU JET Turbo Design 2 Standard-Montagesatz

Article number 2328120000
Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-jet-turbo-design-2-standard-montagesatz-2328120000

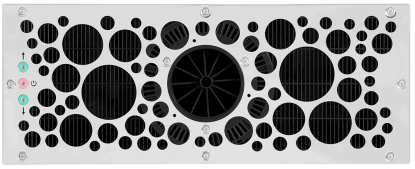

Description

Innovative technology combined with elegant design. Perfect for recreational and leisure swimmers.

Areas of use

For wall installation in all pool designs up to 7 mm thick, except round pools. For performance-oriented workouts, relaxation, rehabilitation training, fitness, or leisure fun with the whole family. For an endless swimming experience without turning.

Version

A flush-mounted housing uses innovative propeller technology to draw water through the cover and return it to the pool in a powerful jet. The system is powered by an efficient, fanless, fully encapsulated permanent magnet motor. Power control and switching on and off are controlled via the integrated piezo buttons or a remote control.

Material short text

BJ Turbo, Stand.-Montagesatz Design 2

Technical data

Hydraulic power

Flow rate	125 – 245 m³/h

Electrics

Power input P_1 (max.)	1.2 kW
Power output P_2 (max.)	0 kW
Voltage (max.)	1~ 200-240 V

General / Product features

Product range	BADU Premium

Connections & piping

Recommended suction line diameter	0 mm
Recommended discharge line diameter	0 mm

Nozzles & counter-current system

Number of nozzles	1 St
Nozzle swivels in all directions	5 °
Outlet pressure at the nozzle	0 bar
Outlet velocity, centred 2 m in front of the nozzle	3 m/s
Massage pressure max.	0 bar

Operating conditions & water

Ambient temperature (min.)	0 ° C
Total salt concentration	0 %

Dimensions & logistics

Customs tariff number	84798997