
SKL

SKL

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/skl-p52094

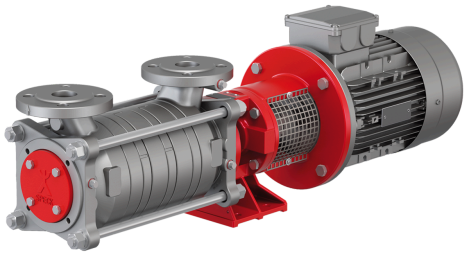

Description

Selbstansaugende und gasmitfördernde Seitenkanalpumpen in Laternenbauweise überzeugen durch ausgezeichnete Saugeigenschaften und arbeiten auch bei größeren Saughöhen sowie unter anspruchsvollen Bedingungen zuverlässig. Sie sind besonders für niedrige bis mittlere Förderhöhen geeignet. Dank einer robusten Gleitringdichtung gewährleisten sie einen verlässlichen Betrieb.

Areas of use

> Wärme- und Kältetechnik: zum Fördern von Kühlsolen sowie zum Befüllen und Entleeren von Thermalölanlagen.

> Energietechnik: für das Umwälzen in geschlossenen Kreisläufen, die Kesselspeisung in Dampferzeugern oder das Fördern von Diesel in Notstromaggregaten.

> Chemie und Pharma: zum Fördern aggressiver, leicht entzündlicher oder toxischer Medien sowie zum Rückgewinnen von Kondensaten, z. B. Lösungsmitteln.

Version

Auf einer Grundplatte komplett montiert, inklusive Pumpe, Motor, Kupplung und Kupplungsschutz.

Technical data

Hydraulic power

Flow rate	5.3 m³/h
Head (min.)	121 mWS

Motor & drive

Speed (max.)	1,450 min-1
Degree of protection	IP 55

Electrics

Input voltage	400 V

Energy efficiency

Energy efficiency class	IE3

Connections & piping

Connection, inlet / suction side	32 DN
Connection, discharge side	32 DN

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137045