
ASKM

ASKM3201 - 3208

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/askm3201-3208-p52097

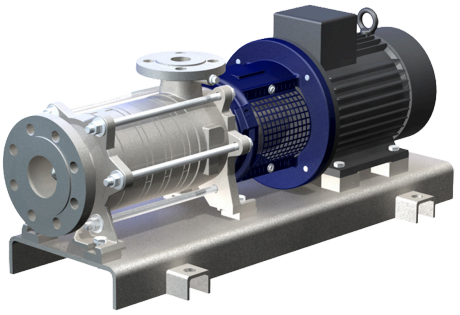

Description

Self-priming, gas-conveying side channel pumps feature a very low NPSH value thanks to the NPSH pre-stage, making them ideal for difficult suction and discharge conditions. Equipped with a magnetic coupling, they enable maintenance-free operation and eliminate the risk of leaks.

Areas of use

>Boiler feed pumps: These are used for efficient boiler feed pumping. >Condensate pumps: These ensure the effective pumping of condensate.

Technical data

Hydraulic power

Flow rate	5.3 m³/h
Head (min.)	320 mWS

Motor & drive

Speed (max.)	1,450 min-1
Degree of protection	IP 55

Electrics

Input voltage	400 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Connections & piping

Connection, inlet / suction side	DN 65
Connection, discharge side	DN 32

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137045