
SKG

# SKG2001 - 2008

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/skg2001-2008-p52102

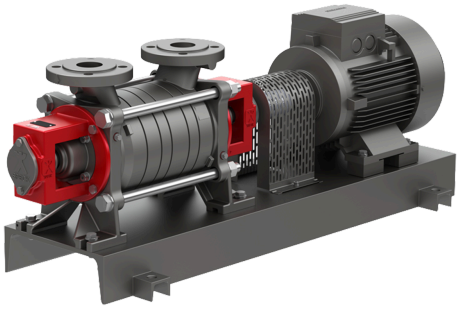

## Description

Self-priming and gas-conveying side channel pumps impress with their excellent suction characteristics, operating reliably even at high suction heads or under demanding conditions. Equipped with a robust mechanical seal, they ensure reliable operation.

## Areas of use

> Water supply: Our pumps ensure a reliable and efficient water supply. > Equipment construction: They are ideal for use in equipment construction and guarantee precise and reliable performance. > Irrigation: Perfectly suited for efficient irrigation systems

## Technical data

### Hydraulic power

| | |
|---|---|
| Flow rate | 3 m³/h |
| Head (min.) | 22 mWS |

### Motor & drive

| | |
|---|---|
| Speed (max.) | 1,450 min-1 |
| Degree of protection | IP 55 |

### Electrics

| | |
|---|---|
| Input voltage | 400 V |
| Frequency | 50 Hz |

### Energy efficiency

| | |
|---|---|
| Energy efficiency class | IE3 |

### Connections & piping

| | |
|---|---|
| Connection, inlet / suction side | DN 20 |
| Connection, discharge side | DN 20 |

### Operating conditions & water

| | |
|---|---|
| Ambient temperature (min.) | 40 ° C |

## Dimensions & logistics

| | |
|---|---|
| Customs tariff number | 84137045 |