
SKG

SKG3301 - 3308

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/skg3301-3308-p52104

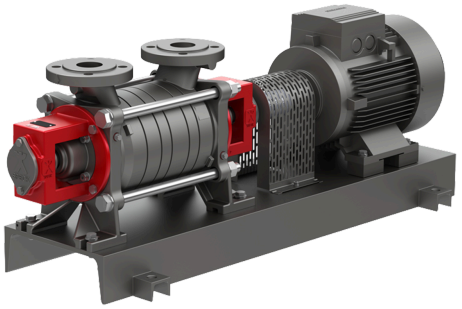

Description

Self-priming and gas-conveying side channel pumps impress with their excellent suction characteristics, operating reliably even at high suction heads or under demanding conditions. Equipped with a robust mechanical seal, they ensure reliable operation.

Areas of use

> Water supply: Our pumps ensure a reliable and efficient water supply. > Equipment construction: They are ideal for use in equipment construction and guarantee precise and reliable performance. > Irrigation: Perfectly suited for efficient irrigation systems

Technical data

Hydraulic power

Flow rate	7.5 m³/h
Head (min.)	245 mWS

Motor & drive

Speed (max.)	1,450 min-1
Degree of protection	IP 55

Electrics

Input voltage	400 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Connections & piping

Connection, inlet / suction side	DN 32
Connection, discharge side	DN 32

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137045