
SKM

SKM3201 - 3208

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/skm3201-3208-p52109

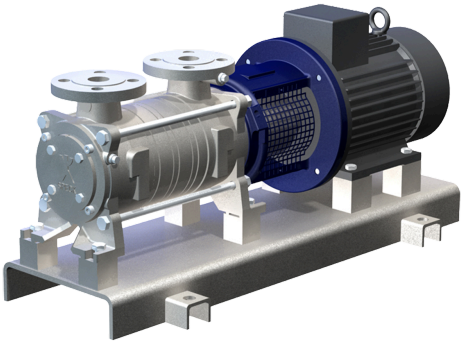

Description

Self-priming, gas-conveying side channel pumps feature a very low NPSH value and a reliable magnetic coupling, making them suitable even for demanding media. The maintenance-free design without a shaft seal offers additional advantages in challenging applications.

Areas of use

> Equipment construction: They are ideal for use in equipment construction and ensure precise and reliable performance.
> Chemical and pharmaceutical industries: Our pumps are ideal for use in the chemical and pharmaceutical industries, where they ensure reliable and safe pumping of liquids.

Technical data

Hydraulic power

Flow rate	5.3 m³/h
Head (min.)	320 mWS

Motor & drive

Speed (max.)	1,450 min-1
Degree of protection	IP 55

Electrics

Input voltage	400 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Connections & piping

Connection, inlet / suction side	DN 32
Connection, discharge side	DN 32

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137045