
BADU 47

# BADU 47/16

| | |
|---|---|
| Article number | 2047160038 |
| GTIN/EAN | 4260673452384 |
| Product page | https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-47-16-2047160038 |

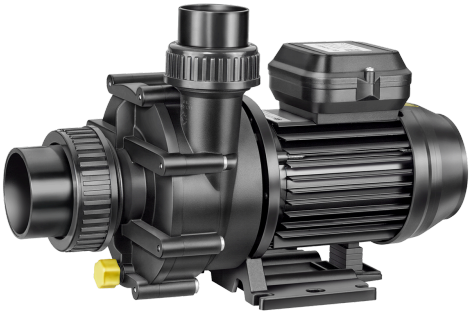

## Description

Solid, medium-sized jet pump. For whirlpools, hot tubs, and spas.

## Areas of use

BADU 42/6, BADU 42/9 and BADU 42/12 are the ideal jet pumps for bathtubs and whirlpools.

## Version

Close-coupled pump with bellows mechanical seal, mounted on a plastic impeller hub. The motor or pump shaft does not come into contact with the circulating water. Electrically isolated.

## Material short text

BADU 47/16, 1~, 0,65kW,m.Kabel/o.Stecker

## Technical data

### Hydraulic power

| | |
|---|---|
| Flow rate | 16 – 21 m³/h |
| Head (min.) | 13 mWS |

### Motor & drive

| | |
|---|---|
| Speed (max.) | 2,840 min-1 |
| Motor phases | 1~ |
| Degree of protection | IP 55 |
| Insulation class | F |

### Electrics

| | |
|---|---|
| Power input $P_1$ (max.) | 0.97 kW |
| Power output $P_2$ (max.) | 0.65 kW |

| | |
|---|---|
| Voltage (max.) | 1~ 230 V |
| Frequency | 50 Hz |

### General / Product features

| | |
|---|---|
| Certification | TÜV |

### Filtration

| | |
|---|---|
| Lint catcher capacity | 0 l |

### Connections & piping

| | |
|---|---|
| Connection, inlet / suction side | 63 mm |
| Connection, discharge side | 50 mm |
| Recommended suction line diameter | 50 mm |
| Recommended discharge line diameter | 50 mm |

### Operating conditions & water

| | |
|---|---|
| Ambient temperature (min.) | 40 ° C |
| Total salt concentration | 5 g/l |

## Dimensions & logistics

| | |
|---|---|
| Product length | 409 mm |
| Net weight | 8 kg |
| Customs tariff number | 84137051 |