
BADU GAMMA ECO VS

BADU Gamma Eco VS

Article number	2105231138
GTIN/EAN	4260673452025
Product page	https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-gamma-eco-vs-2105231138

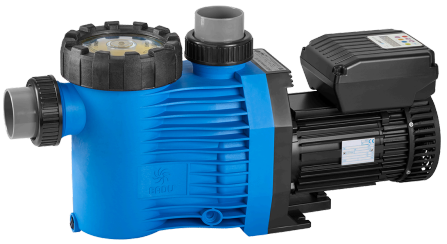

Description

The new bestseller after our BADU Prime with adjustable PM motor Efficient, modern, well thought out

Areas of use

Swimming pool water circulation in filter systems, can be installed max. 3 m above or below the water level

Version

Close-coupled pump with integrated fiber catcher. Bellows mechanical seal mounted on a plastic impeller hub. The motor or pump shaft does not come into contact with the circulating water. Electrically isolated. Fiber catcher capacity approx. 3 l Suction screen mesh size approx. 3.2 x 2.6 mm

Material short text

BADU Gamma Eco VS, 1~, 1,10 kW, blau

Technical data

Hydraulic power

Flow rate	24 m³/h
Head (min.)	22.8 mWS

Motor & drive

Speed (max.)	600 – 3,000 min-1
Motor phases	1~
Degree of protection	IP 55
Insulation class	F

Electrics

Power input P_1 (max.)	0.03 – 1.4 kW

Power output P_2 (max.)	0.01 – 1.1 kW
Voltage (max.)	1~ 230 V
Frequency	50 Hz

General / Product features

Product range	BADU Premium, BADU Green
Certification	TÜV, Patent, Green

Filtration

Lint catcher capacity	3 l

Connections & piping

Connection, inlet / suction side	63 mm / 2 Rp
Connection, discharge side	63 mm / 2 Rp
Recommended suction line diameter	63 mm
Recommended discharge line diameter	63 mm

Acoustics

Sound pressure level (min.)	34.5 – 64.2 dB[A]

Operating conditions & water

Ambient temperature (min.)	40 ° C
Total salt concentration	5 g/l

Dimensions & logistics

Product length	629 mm
Net weight	11.4 kg
Customs tariff number	84137051