
BADU PROFI-MK

BADU Profi-MK 44

Article number	2102480237
GTIN/EAN	4260673451226
Product page	https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-profi-mk-44-2102480237

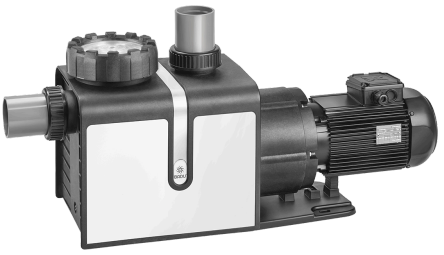

Description

Dichtungslose Pumpe für den Pool. Einzigartif, zuverlässg und kompromisslos.

Areas of use

Schwimmbadwasser-Umwälzung in Filteranlagen, aufstellbar jeweils max. 1,5 m oberhalb oder 3 m unterhalb des Wasserniveaus.

Version

Blockpumpe mit integriertem Fasernfänger. Motor- bzw. Pumpenwelle kommt mit dem im Kreislauf befindlichen Wasser nicht in Berührung. Elektrische Trennung.
Fasernfängerinhalt ca. 4 l
Saugsiebmaschenweite ca. 3,2 x 2,6 mm

Auch für Chemieanwendungen mit anderen Werkstoffkombinationen lieferbar.

Material short text

BADU Profi-MK 44, 3~, 2,20 kW

Technical data

Hydraulic power

Flow rate	50 m³/h
Head (min.)	18.6 mWS

Motor & drive

Speed (max.)	2,840 min-1
Motor phases	3~
Degree of protection	IP 55
Insulation class	F

Electrics

Power input P_1 (max.)	2.54 kW
Power output P_2 (max.)	2.2 kW
Voltage (max.)	3~ Y/Δ 400/230 V
Frequency	50 Hz

General / Product features

Certification	TÜV, Patent

Filtration

Lint catcher capacity	4 l

Connections & piping

Connection, inlet / suction side	75 mm
Connection, discharge side	75 mm
Recommended suction line diameter	110 mm
Recommended discharge line diameter	110 mm

Operating conditions & water

Ambient temperature (min.)	40 ° C
Total salt concentration	5 g/l

Dimensions & logistics

Product length	879 mm
Net weight	37.3 kg
Customs tariff number	84137051