
NP25

# NP25-38-280

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/np25-38-280-p53089

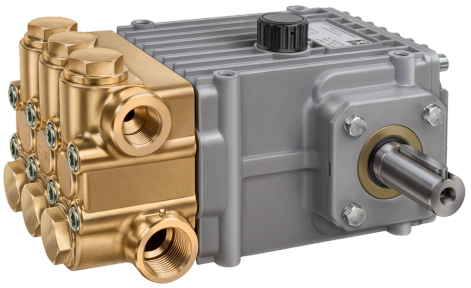

## Description

High-pressure plunger pumps of the NP 25 series are oscillating positive displacement pumps and therefore offer high efficiency because the fluid is moved directly and with minimal loss. Compared to rotating positive displacement pumps, they enable more precise pumping at high pressures and low flow rates, making them particularly efficient for demanding applications.

## Sales text

NP25/38-280

## Areas of use

>High-pressure cleaning: They ensure effective high-pressure cleaning. >Air humidification: They ensure even and efficient air humidification. >Fire extinguishing systems: They are used in fire extinguishing systems for safe firefighting. >Sewer cleaning: They support the efficient cleaning of sewers.

## Technical data

### Hydraulic power

| | |
|---|---|
| Flow rate | 37.3 l/min |
| Head (min.) | 2,855.205 mWS |
| Operating pressure max. | 280 bar |

### Motor & drive

| | |
|---|---|
| Speed (max.) | 1,450 min-1 |

### Electrics

| | |
|---|---|
| Power input max. | 20.6 kW |
| Frequency | 50 Hz |

### Connections & piping

| | |
|---|---|
| Connection, inlet / suction side | 2x G3/4" |

| | |
|---|---|
| Connection, discharge side | 2x G3/4" |

### Operating conditions & water

| | |
|---|---|
| Ambient temperature (min.) | 40 ° C |
| Temperature min. | 70 ° C |

## Dimensions & logistics

| | |
|---|---|
| Customs tariff number | 84135080 |