
NP25

NP25-41-170

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/np25-41-170-p53090

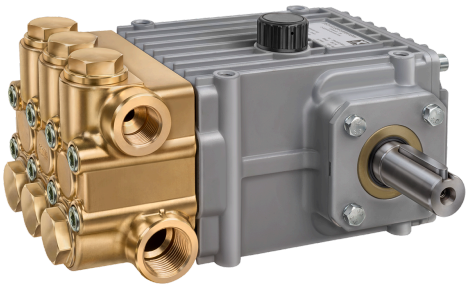

Description

High-pressure plunger pumps of the NP 25 series are oscillating positive displacement pumps and therefore offer high efficiency because the fluid is moved directly and with minimal loss. Compared to rotating positive displacement pumps, they enable more precise pumping at high pressures and low flow rates, making them particularly efficient for demanding applications.

Sales text

NP25/41-170

Areas of use

>High-pressure cleaning: They ensure effective high-pressure cleaning. >Air humidification: They ensure even and efficient air humidification. >Fire extinguishing systems: They are used in fire extinguishing systems for safe firefighting. >Sewer cleaning: They support the efficient cleaning of sewers.

Technical data

Hydraulic power

Flow rate	40.4 l/min
Head (min.)	1,733.517 mWS
Operating pressure max.	170 bar

Motor & drive

Speed (max.)	1,450 min-1

Electrics

Power input max.	13.5 kW
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Connections & piping

Connection, inlet / suction side	2x G3/4"
Connection, discharge side	2x G1/2"

Operating conditions & water

Ambient temperature (min.)	40 ° C
Temperature min.	70 ° C

Dimensions & logistics

Customs tariff number	84135080