
P20

P20-23-130 RED

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/p20-23-130-red-p53189

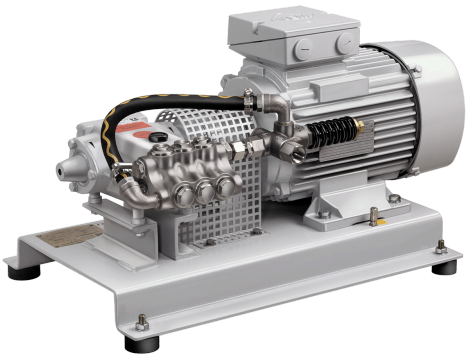

Description

Speck Hochdruck-Plungerpumpen in RE-Ausführung (Edelstahl 1.4571) sind geeignet zur Förderung von sauberem Wasser oder anderen nicht aggressiven oder abrassiven Medien mit ähnlichem spezifischen Gewicht wie Wasser. Vor dem Verpumpen anderer Fördermedien muss die Eignung und Beständigkeit der Pumpen unter Berücksichtigung der Leistungs- und Temperaturwerte geprüft werden.

Sales text

P20/23-130 RED

Areas of use

> Verschiedene Industrieprozesse: Sie sind ideal für verschiedene Industrieprozesse, die präzise Förderung bei hohen Drücken.

> Dampfkesselanlagen: Sie werden in Dampfkesselanlagen eingesetzt, um einen zuverlässigen hohen Flüssigkeitsdruck zu erzeugen.

Technical data

Hydraulic power

Flow rate	879 l/min
Head (min.)	611.83 mWS
Operating pressure max.	60 bar

Motor & drive

Speed (max.)	750 – 900 min-1

Electrics

Power input max.	1.9 kW
Frequency	50 Hz

Connections & piping

Connection, inlet / suction side	2x G1/2"
Connection, discharge side	2x G3/8"

Operating conditions & water

Ambient temperature (min.)	40 ° C
Temperature min.	90 ° C

Dimensions & logistics

Customs tariff number	84135080