
BADU 47

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-47-p53598

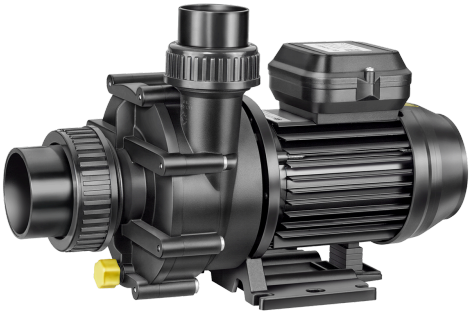

Description

Solid, medium-sized jet pump. For whirlpools, hot tubs, and spas.

Areas of use

BADU 42/6, BADU 42/9 and BADU 42/12 are the ideal jet pumps for bathtubs and whirlpools.

Version

Close-coupled pump with bellows mechanical seal, mounted on a plastic impeller hub. The motor or pump shaft does not come into contact with the circulating water. Electrically isolated.

Technical data

Motor & drive

Speed (max.)	2,840 min-1
Motor phases	1~
Degree of protection	IP 55
Insulation class	F

Electrics

Voltage (max.)	1~ 230 V
Frequency	50 Hz

General / Product features

Certification	TÜV

Filtration

Lint catcher capacity	0 l

Connections & piping

Connection, inlet / suction side	63 mm
Recommended suction line diameter	50 mm

Operating conditions & water

Ambient temperature (min.)	40 ° C
Total salt concentration	5 g/l

Dimensions & logistics

Customs tariff number	84137051

Variants

Article number	Name	Flow rate	Head (min.)	Power input P_1 (max.)	Power output P_2 (max.)	Connection, discharge side	Recommended discharge line diameter
2047100038	BADU 47/10	10 – 15 m³/h	11 mWS	0.69 kW	0.45 kW	50 mm	50 mm
2047160038	BADU 47/16	16 – 21 m³/h	13 mWS	0.97 kW	0.65 kW	50 mm	50 mm
2047220038	BADU 47/22	22 – 26 m³/h	13.5 mWS	1.2 kW	0.8 kW	63 mm	63 mm
2047050038	BADU 47/5	5 – 11 m³/h	10 mWS	0.58 kW	0.3 kW	50 mm	50 mm