
BADU Gamma

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-gamma-p53616

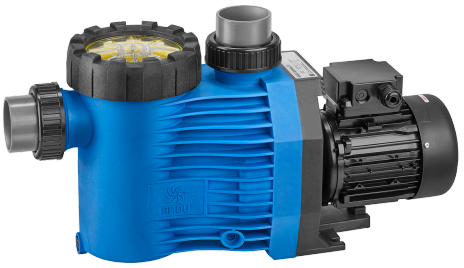

Description

The new bestseller after our BADU Prime Equipped with internal and external thread Efficient, modern, well thought out

Areas of use

Swimming pool water circulation in filter systems, can be installed max. 3 m above or below the water level

Version

Close-coupled pump with integrated fiber catcher. Bellows mechanical seal mounted on a plastic impeller hub. The motor or pump shaft does not come into contact with the circulating water. Electrically isolated. Fiber catcher capacity approx. 3 l Suction screen mesh size approx. 3.2 x 2.6 mm

Technical data

Motor & drive

Speed (max.)	2,840 min-1
Degree of protection	IP 55
Insulation class	F

Electrics

Frequency	50 Hz

Energy efficiency

Energy efficiency class	D

General / Product features

Certification	TÜV

Filtration

Lint catcher capacity	3 l

Operating conditions & water

Ambient temperature (min.)	40 ° C
Total salt concentration	5 g/l

Dimensions & logistics

Customs tariff number	84137051

Variants

Article number	Name	Flow rate	Head (min.)	Motor phases	Power input P_1 (max.)	Power output P_2 (max.)	Voltage (max.)	Connection, inlet / suction side	Connection, discharge side	Recommended suction line diameter	Recommended discharge line diameter
2105110037	BADU Gamma 11	11 m³/h	13.6 mWS	3~	0.59 kW	0.45 kW	3~ Y/Δ 400/230 V	63 mm / 2 Rp	63 mm / 2 Rp	63 mm	63 mm
2105110038	BADU Gamma 11	11 m³/h	13.6 mWS	1~	0.61 kW	0.45 kW	1~ 230 V	63 mm / 2 Rp	63 mm / 2 Rp	63 mm	63 mm
2105150037	BADU Gamma 15	15 m³/h	14.1 mWS	3~	0.69 kW	0.55 kW	3~ Y/Δ 400/230 V	63 mm / 2 Rp	63 mm / 2 Rp	63 mm	63 mm
2105150038	BADU Gamma 15	15 m³/h	14.1 mWS	1~	0.72 kW	0.55 kW	1~ 230 V	63 mm / 2 Rp	63 mm / 2 Rp	63 mm	63 mm
2105200037	BADU Gamma 20	20 m³/h	15.3 mWS	3~	0.9 kW	0.75 kW	3~ Y/Δ 400/230 V	63 mm / 2 Rp	63 mm / 2 Rp	63 mm	63 mm
2105200038	BADU Gamma 20	20 m³/h	15.3 mWS	1~	1.03 kW	0.75 kW	1~ 230 V	63 mm / 2 Rp	63 mm / 2 Rp	63 mm	63 mm
2105230037	BADU Gamma 23	23 m³/h	17.6 mWS	3~	1.2 kW	1 kW	3~ Y/Δ 400/230 V	63 mm / 2 Rp	63 mm / 2 Rp	63 mm	63 mm
2105230038	BADU Gamma 23	23 m³/h	17.6 mWS	1~	1.29 kW	1 kW	1~ 230 V	63 mm / 2 Rp	63 mm / 2 Rp	63 mm	63 mm
2105290037	BADU Gamma 29	29 m³/h	16.6 mWS	3~	1.54 kW	1.3 kW	3~ Y/Δ 400/230 V	75 mm / 2 Rp	75 mm / 2 Rp	75 mm	75 mm
2105290038	BADU Gamma 29	29 m³/h	16.6 mWS	1~	1.68 kW	1.3 kW	1~ 230 V	75 mm / 2 Rp	75 mm / 2 Rp	75 mm	75 mm
2105320037	BADU Gamma 32	32 m³/h	18.4 mWS	3~	1.76 kW	1.5 kW	3~ Y/Δ 400/230 V	75 mm / 2 Rp	75 mm / 2 Rp	75 mm	75 mm
2105320038	BADU Gamma 32	32 m³/h	18.4 mWS	1~	1.84 kW	1.5 kW	1~ 230 V	75 mm / 2 Rp	75 mm / 2 Rp	75 mm	75 mm
2105070037	BADU Gamma 7	7 m³/h	12.6 mWS	3~	0.41 kW	0.3 kW	3~ Y/Δ 400/230 V	50 mm / 2 Rp	50 mm / 2 Rp	50 mm	50 mm

Article number	Name	Flow rate	Head (min.)	Motor phases	Power input P_1 (max.)	Power output P_2 (max.)	Voltage (max.)	Connection, inlet / suction side	Connection, discharge side	Recommended suction line diameter	Recommended discharge line diameter
2105070038	BADU Gamma 7	7 m³/h	0 – 12.6 mWS	1~	0.46 kW	0.3 kW	1~ 230 V	50 mm / 2 Rp	50 mm / 2 Rp	50 mm	50 mm