
BADU Bronze Eco VS We.

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-bronze-eco-vs-we-p53641

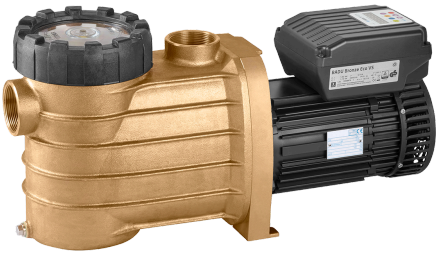

Material short text

BADU Bronze Eco VS, 1~, 1,10 kW

Technical data

Hydraulic power

Flow rate	28 m³/h
Head (min.)	21.9 mWS

Motor & drive

Speed (max.)	600 – 3,000 min-1
Motor phases	1~
Degree of protection	IP 55
Insulation class	F

Electrics

Power input P_1 (max.)	0.03 kW
Power output P_2 (max.)	0.01 kW
Voltage (max.)	1~ 230 V
Frequency	50 Hz

General / Product features

Certification	TÜV, Patent, Green

Filtration

Lint catcher capacity	3 l

Connections & piping

Connection, inlet / suction side	2 Rp

Connection, discharge side	2 Rp
Recommended suction line diameter	63 mm
Recommended discharge line diameter	63 mm

Operating conditions & water

Ambient temperature (min.)	40 ° C
Total salt concentration	5 g/l

Dimensions & logistics

Customs tariff number	84137051

Variants

Article number
2101022138