
BADU Resort-AK

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-resort-ak-p53666

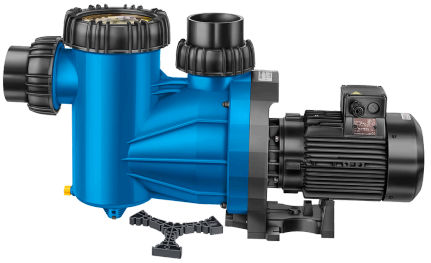

Description

Salzwasser-optimierte Umwälzpumpen mit Antrieb-Pumpen-Trennung. Für längere Standzeiten in korrosiver Umgebung.

Version

Blockpumpe mit integriertem Fasernfänger.
Balg-Gleitringdichtung auf Kunststoff-Laufradnabe montiert.
Motor- bzw. Pumpenwelle kommt mit dem im Kreislauf befindlichen Wasser nicht in Berührung.
Elektrische Trennung.
Fasernfängerinhalt ca. 10 l
Saugsiebmaschenweite ca. 3,4 x 3,2 mm

Technical data

Hydraulic power

Operating pressure max.	0 bar

Motor & drive

Degree of protection	IP 55
Insulation class	F

Electrics

Frequency	50 Hz

Operating conditions & water

Total salt concentration	0 g/l

Dimensions & logistics

Customs tariff number	84137051

Variants

Article number	Name	Flow rate	Head (min.)	Speed (max.)	Motor phases	Power input P_1 (max.)	Power output P_2 (max.)	Voltage (max.)	Connection, inlet / suction side	Connection, discharge side	Recommended suction line diameter	Recommended discharge line diameter
2195110157	BADU Resort 110-AK	110 m³/h	0 – 22 mWS	2,840 min-1	3-phasig	6.15 kW	5.5 kW	3~ Y/Δ 690/400 V	110 mm	110 mm	140 mm	160 mm
2195300157	BADU Resort 30-AK	30 m³/h	0 mWS	2,840 min-1	3~	1.77 kW	1.5 kW	–	75 mm	75 mm	75 mm	75 mm
2195400157	BADU Resort 40-AK	40 m³/h	0 – 18.1 mWS	2,840 min-1	3~	2.55 kW	2.2 kW	3~ Y/Δ 400/230 V	90 mm	90 mm	90 mm	90 mm
2195450157	BADU Resort 45-AK	45 m³/h	0 – 20.4 mWS	2,850 min-1	3~	3 kW	2.6 kW	3~ Y/Δ 400/230 V	90 mm	90 mm	90 mm	90 mm
2195500157	BADU Resort 50-AK	50 m³/h	0 – 22.3 mWS	2,840 min-1	3~	3.45 kW	3 kW	3~ Y/Δ 400/230 V	110 mm	110 mm	110 mm	110 mm
2195550157	BADU Resort 55-AK	55 m³/h	0 – 24.5 mWS	2,840 min-1	3~	4.55 kW	4 kW	3~ Y/Δ 400/230 V	110 mm	110 mm	110 mm	110 mm
2195600157	BADU Resort 60-AK	60 m³/h	0 – 14 mWS	2,840 min-1	3~	3 kW	2.6 kW	3~ Y/Δ 690/400 V	110 mm	110 mm	110 mm	110 mm
2195700157	BADU Resort 70-AK	70 m³/h	0 – 16 mWS	2,840 min-1	3~	3.45 kW	3 kW	3~ Y/Δ 400/230 V	110 mm	110 mm	110 mm	110 mm
2195800157	BADU Resort 80-AK	80 m³/h	0 – 18 mWS	2,840 min-1	3~	4.55 kW	4 kW	3~ Y/Δ 690/400 V	110 mm	110 mm	140 mm	140 mm