
BADU Resort-PM

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-resort-pm-p53667

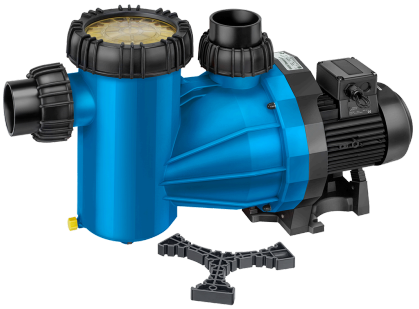

Description

Synchronous drive for external control system. Efficient circulation pump for large pools.

Version

Close-coupled pump with integrated fiber catcher. Bellows mechanical seal mounted on a plastic impeller hub. The motor or pump shaft does not come into contact with the circulating water. Electrically isolated. Fiber catcher capacity approx. 10 l Suction screen mesh size approx. 3.4 x 3.2 mm

Technical data

Hydraulic power

Head (min.)	0 mWS
Operating pressure max.	0 bar

Motor & drive

Speed (max.)	3,000 min-1
Motor phases	3~
Degree of protection	IP 55
Insulation class	F

Electrics

Frequency	50 Hz

Operating conditions & water

Ambient temperature (min.)	40 ° C
Total salt concentration	5 g/l

Dimensions & logistics

Customs tariff number	84137051

Variants

Article number	Name	Flow rate	Power input P_1 (max.)	Power output P_2 (max.)	Connection, inlet / suction side	Connection, discharge side	Recommended suction line diameter	Recommended discharge line diameter
2195118137	BADU Resort 110-PM	110 m³/h	5.98 kW	5.5 kW	160	140	140 mm	160 mm
2195508137	BADU Resort 50-PM	50 m³/h	3.28 kW	3 kW	110	110	110 mm	110 mm
2195708137	BADU Resort 70-PM	70 m³/h	3.28 kW	3 kW	110	110	110 mm	110 mm