
DS MK

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/ds-mk-p53761

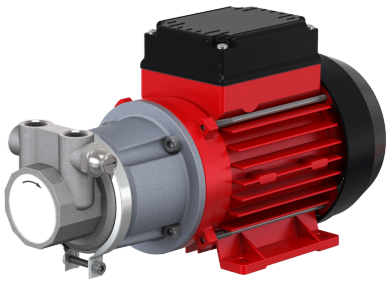

Description

Self-priming, magnetically coupled rotary vane pumps with a relatively constant flow rate at operating pressures up to 14 bar, equipped with an integrated overflow valve to protect sensitive system components.

Areas of use

>Reverse osmosis systems: Constant supply for water treatment processes. >Industrial spray applications: Precise and reliable delivery for effective industrial cooling.

Technical data

Motor & drive

Degree of protection	IP 54

Electrics

Frequency	50 Hz

Dimensions & logistics

Customs tariff number	84136061

Variants

Article number	Name	Flow rate	Head (min.)	Speed (max.)	Power output P_2 (max.)	Connection, inlet / suction side	Connection, discharge side
	DS 120 MK	1.9 l/min	101.972 mWS	2,800 min-1	0.3 kW	G 3/8"	G 3/8"
	DS 240 MK	4.1 l/min	101.972 mWS	2,800 min-1	0.3 kW	G 3/8"	G 3/8"
	DS 360 MK	5.9 l/min	81.577 mWS	2,800 min-1	0.3 kW	G 3/8"	G 3/8"
	DS 450 MK	8.2 l/min	81.577 mWS	2,800 min-1	0.3 kW	G 3/8"	G 3/8"
	DS 540 MK	9 l/min	142.76 mWS	1,450 min-1	0.75 kW	G1/2"	G1/2"
	DS 600 MK	10.8 l/min	142.76 mWS	1,450 min-1	0.75 kW	G1/2"	G1/2"

Article number	Name	Flow rate	Head (min.)	Speed (max.)	Power output P_2 (max.)	Connection, inlet / suction side	Connection, discharge side
	DS 960 MK	15.8 l/min	142.76 mWS	1,450 min-1	0.75 kW	G1/2"	G1/2"