
P11

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/p11-p53771

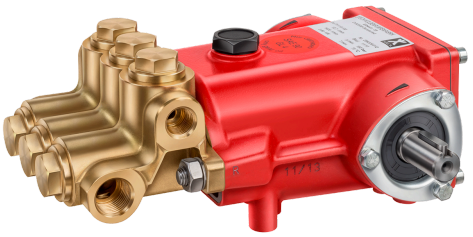

Technical data

Electrics

Frequency	50 Hz

Connections & piping

Connection, inlet / suction side	2x G1/2"
Connection, discharge side	2x G3/8"

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84135080

Variants

Article number	Name	Flow rate	Head (min.)	Operating pressure max.	Speed (max.)	Power input max.	Temperature min.
	P11-10-150	10.2 l/min	1,529.574 mWS	150 bar	1,420 min-1	3.1 kW	70 ° C
	P11-10-150D	6.5 l/min	611.83 mWS	60 bar	750 – 900 min-1	0.8 kW	90 ° C
	P11-13-150	12.7 l/min	1,529.574 mWS	150 bar	1,420 min-1	3.9 kW	70 ° C
	P11-13-150D	8.8 l/min	611.83 mWS	60 bar	750 – 900 min-1	1 kW	90 ° C
	P11-15-150	14.7 l/min	1,529.574 mWS	150 bar	1,420 min-1	4.5 kW	70 ° C
	P11-15-150D	9.3 l/min	611.83 mWS	60 bar	750 – 900 min-1	1.2 kW	90 ° C
	P11-3-200	3.1 l/min	2,039.432 mWS	200 bar	1,420 min-1	1.3 kW	70 ° C

Article number	Name	Flow rate	Head (min.)	Operating pressure max.	Speed (max.)	Power input max.	Temperature min.
	P11-5-200	4.7 l/min	2,039.432 mWS	200 bar	1,420 min-1	1.9 kW	70 ° C