
P21

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/p21-p53773

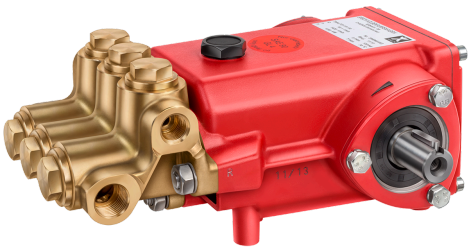

Technical data

Electrics

Frequency	50 Hz

Connections & piping

Connection, inlet / suction side	2x G1/2"
Connection, discharge side	2x G3/8"

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84135080

Variants

Article number	Name	Flow rate	Head (min.)	Operating pressure max.	Speed (max.)	Power input max.	Temperature min.
	P21-15-160	14.7 l/min	1,631.546 mWS	160 bar	1,420 min-1	4.6 kW	70 ° C
	P21-16-200	15.1 l/min	2,039.432 mWS	200 bar	1,450 min-1	5.9 kW	70 ° C
	P21-18-130	18.1 l/min	1,325.631 mWS	130 bar	1,420 min-1	4.6 kW	70 ° C
	P21-19-160	18.9 l/min	1,631.546 mWS	160 bar	1,420 min-1	6 kW	70 ° C
	P21-23-130	23.1 l/min	1,325.631 mWS	130 bar	1,450 min-1	5.9 kW	70 ° C
	P21-23-130D	14.7 l/min	611.83 mWS	60 bar	750 – 900 min-1	1.9 kW	90 ° C
	P21-28-130D	11.5 l/min	611.83 mWS	60 bar	750 – 900 min-1	1.5 kW	90 ° C

Article number	Name	Flow rate	Head (min.)	Operating pressure max.	Speed (max.)	Power input max.	Temperature min.
	P21-5-450	5.1 l/min	4,588.722 mWS	450 bar	1,420 min-1	0 kW	70 ° C
	P21-7-400	6.8 l/min	4,078.864 mWS	400 bar	1,420 min-1	5.6 kW	70 ° C