
P30

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/p30-p53775

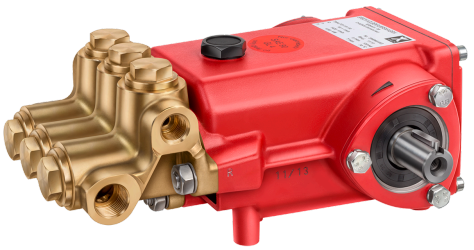

Technical data

Electrics

Frequency	50 Hz

Connections & piping

Connection, inlet / suction side	2x G3/4"
Connection, discharge side	2x G1/2"

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84135080

Variants

Article number	Name	Flow rate	Head (min.)	Operating pressure max.	Speed (max.)	Power input max.	Temperature min.
	P30-36-150	36.2 l/min	1,529.574 mWS	150 bar	1,420 min-1	0 kW	70 ° C
	P30-36-150D	23 l/min	611.83 mWS	60 bar	750 – 900 min-1	3 kW	90 ° C
	P30-43-130	42.5 l/min	1,325.631 mWS	130 bar	1,420 min-1	0 kW	70 ° C
	P30-43-130D	26.9 l/min	611.83 mWS	60 bar	750 – 900 min-1	3.5 kW	90 ° C