
P41

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/p41-p53777

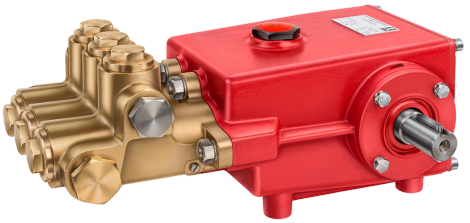

Technical data

Electrics

Frequency	50 Hz

Connections & piping

Connection, inlet / suction side	2x G1"
Connection, discharge side	2x G3/4"

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84135080

Variants

Article number	Name	Flow rate	Head (min.)	Operating pressure max.	Speed (max.)	Power input max.	Temperature min.
	P41-33-250	33.8 l/min	2,549.29 mWS	250 bar	1,450 min-1	17.2 kW	70 ° C
	P41-48-180	48.6 l/min	1,835.489 mWS	180 bar	1,450 min-1	17.9 kW	70 ° C
	P41-51-130	51.2 l/min	1,325.631 mWS	130 bar	1,100 min-1	13.6 kW	70 ° C
	P41-58-110	58.2 l/min	1,121.688 mWS	110 bar	1,100 min-1	13.1 kW	70 ° C
	P41-58-110D	39.7 l/min	815.773 mWS	80 bar	750 min-1	6.3 kW	105 ° C
	P41-70-110	67.7 l/min	1,121.688 mWS	110 bar	1,100 min-1	15.2 kW	70 ° C
	P41-70-110D	46.2 l/min	815.773 mWS	80 bar	750 min-1	7.3 kW	105 ° C