
# P50

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/p50-p53779

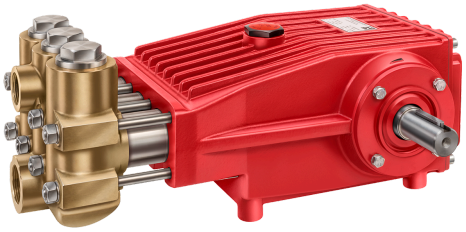

## Technical data

### Electrics

| | |
|---|---|
| Frequency | 50 Hz |

### Operating conditions & water

| | |
|---|---|
| Ambient temperature (min.) | 40 ° C |

## Dimensions & logistics

| | |
|---|---|
| Customs tariff number | 84135080 |

## Variants

| Article number | Name | Flow rate | Head (min.) | Operating pressure max. | Speed (max.) | Power input max. | Connection, inlet / suction side | Connection, discharge side | Temperature min. |
|---|---|---|---|---|---|---|---|---|---|
| | P50-94-110 | 93.8 l/min | 1,121.688 mWS | 110 bar | 800 min-1 | 20.3 kW | G 1 1/4" | G1" | 70 ° C |
| | P50-94-110D | 66.8 l/min | 815.773 mWS | 80 bar | 570 min-1 | 10.5 kW | 2x G1 1/4" | 2x G1" | 105 ° C |