
P71

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/p71-p53784

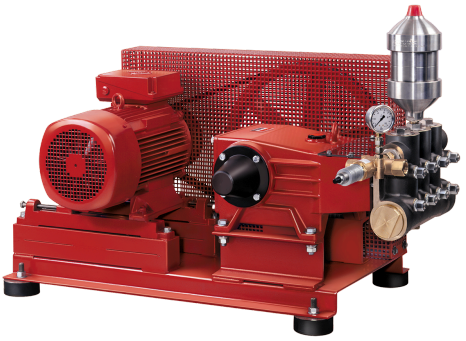

Technical data

Electrics

Frequency	50 Hz

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84135080

Variants

Article number	Name	Flow rate	Head (min.)	Operating pressure max.	Speed (max.)	Power input max.	Connection, inlet / suction side	Connection, discharge side	Temperature min.
	P71-110-250	107.3 l/min	2,651.262 mWS	250 bar	700 min-1	52.8 kW	2G 1 1/4"	2x G 3/4"	70 ° C
	P71-145-180	145.2 l/min	1,835.489 mWS	180 bar	700 min-1	51.5 kW	2x G 2 1/2"	2x G 1 1/4"	70 ° C
	P71-145-180D	95 l/min	815.773 mWS	80 bar	460 min-1	15 kW	2x G 2 1/2"	2x G 1 1/4"	105 ° C
	P71-200-130	205.8 l/min	1,325.631 mWS	130 bar	700 min-1	52.7 kW	2x G 2 1/2"	2x G 1 1/4"	70 ° C
	P71-250-100	249.1 l/min	1,019.716 mWS	100 bar	700 min-1	49 kW	2x G 2 1/2"	2x G 1 1/4"	70 ° C
	P71-250-100 DK	–	815.773 mWS	80 bar	460 min-1	26 kW	2x G 2 1/2"	2x G 1 1/4"	105 ° C
	P71-40-700	37.4 l/min	7,138.012 mWS	700 bar	750 min-1	51.5 kW	2G 1 1/4"	2x G 3/4"	70 ° C
	P71-70-400	67.7 l/min	4,180.836 mWS	400 bar	750 min-1	53.5 kW	2G 1 1/4"	2x G 3/4"	70 ° C
	P71-90-300	88.5 l/min	3,161.12 mWS	300 bar	750 min-1	52.2 kW	2G 1 1/4"	2x G 3/4"	70 ° C