
ES

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/es-p53787

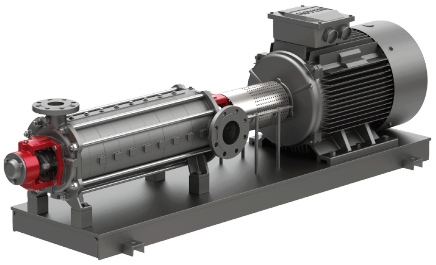

Description

Multistage, non-self-priming boiler feed pumps, used for water applications with high flow rates and high back pressure.

Areas of use

>Boiler feed systems: Our pumps ensure reliable and efficient boiler feed in boiler systems. >Water supply systems: They guarantee a constant and efficient water supply.

Technical data

Motor & drive

Degree of protection	IP 55

Electrics

Input voltage	400 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137075

Variants

Article number	Name	Flow rate	Head (min.)	Power output P_2 (max.)	Connection, inlet / suction side	Connection, discharge side
	ES 320	28 m³/h	416 mWS	37 kW	DN50	DN32

Article number	Name	Flow rate	Head (min.)	Power output P_2 (max.)	Connection, inlet / suction side	Connection, discharge side
	ES 400	40 m³/h	392 mWS	55 kW	DN65	DN40
	ES 500	68 m³/h	387 mWS	90 kW	DN80	DN50
	ES 650	110 m³/h	586 mWS	200 kW	DN100	DN65