
CY

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/cy-p53792

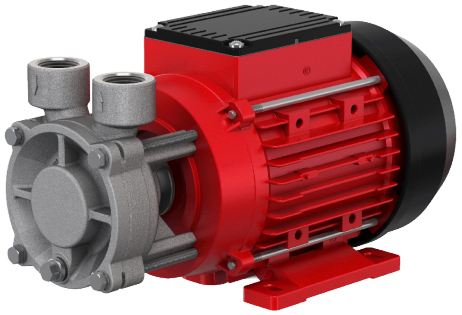

Description

Non-self-priming peripheral impeller pumps offer high pressure at low flow rates and impress with their compact design. They are available with a mechanical seal for reliable and low-maintenance operation.

Areas of use

> Cooling circuits: Our pumps ensure reliable cooling in various applications. > Make-up systems: They ensure efficient and precise make-up of water-like liquids.

Technical data

Motor & drive

Speed (max.)	2,800 min-1
Degree of protection	IP 54

Electrics

Input voltage	230 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137045

Variants

Article number	Name	Flow rate	Head (min.)	Operating pressure max.	Power output P_2 (max.)	Connection, inlet / suction side	Connection, discharge side	Motor phases
	CY 4081	55 l/min	42 mWS	42 mWS	1 kW	G 3/4"	G 3/4"	–
	CY 5091	100 l/min	60 mWS	60 mWS	2.8 kW	SAE1	SAE 1	3~