
NPY MK

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/npy-mk-p53800

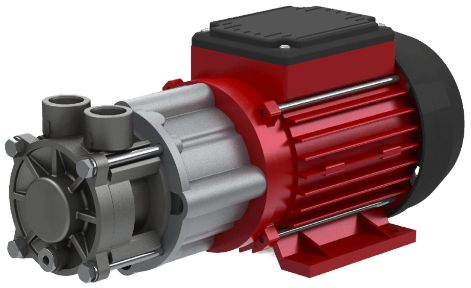

Description

Non-self-priming peripheral impeller pumps with magnetic coupling are characterized by high pressure at low flow rates and a compact design. Thanks to the magnetic coupling, they are leak-free and maintenance-free.

Areas of use

> Cooling circuits: Our pumps ensure reliable cooling in a variety of applications. > Temperature controls: They ensure precise and efficient temperature control.

Technical data

Hydraulic power

Flow rate	27 l/min
Head (min.)	48 mWS
Operating pressure max.	48 mWS

Motor & drive

Speed (max.)	2,800 min-1
Degree of protection	IP 54

Electrics

Input voltage	230 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137035

Variants

Article number	Name	Power output P_2 (max.)	Connection, inlet / suction side	Connection, discharge side
	NPY 2251 MK	0.5 kW	G 1/2" / SEA 1/2"	G 1/2" / SEA 1/2"
	NPY 2251 MK HT	0.5 kW	G 1/2" / SAE 1/2"	G 1/2" / SAE 1/2"
	NPY 2251 MK TOE	0.55 kW	G 1/2" / SAE 1/2"	G 1/2" / SAE 1/2"