
BluLine

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/bluline-p53812

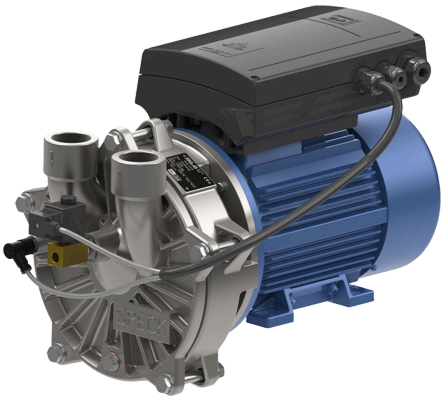

Areas of use

Plastics processing: Our pumps support wet and dry calibration of plastic profiles as well as extruder compounding.

Technical data

Motor & drive

Degree of protection	IP 55

Electrics

Input voltage	400 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84141089

Variants

Article number	Name	Suction pressure	Power output P_2 (max.)	Connection, inlet / suction side	Connection, discharge side
	VB 140 BL	800 mbar	1.5 kW	G 1 1/2"	G 1 1/2"
	VG 130 BL	83 mbar	3 kW	G 1 1/2"	G 1 1/2"
	VG 155 BL	53 mbar	4.3 kW	G 1 1/2"	G 1 1/2"
	VG 210 BL	750 mbar	2.8 kW	G 2"	G 2"
	VG 30 BL	83 mbar	0.75 kW	G 1 1/2"	G 1 1/2"
	VG 415 BL	750 mbar	4.3 kW	G 2"	G 2"

Article number	Name	Suction pressure	Power output P_2 (max.)	Connection, inlet / suction side	Connection, discharge side
	VG 55 BL	83 mbar	1.5 kW	G 1 1/2"	G 1 1/2"
	VG 95 BL	83 mbar	3 kW	G 1 1/2"	G 1 1/2"
	VN 125 BL	83 mbar	4.3 kW	G 1 1/2"	G 1 1/2"
	VN 95 BL	83 mbar	2.8 kW	G 1 1/2"	G 1 1/2"