
VU

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/vu-p53821

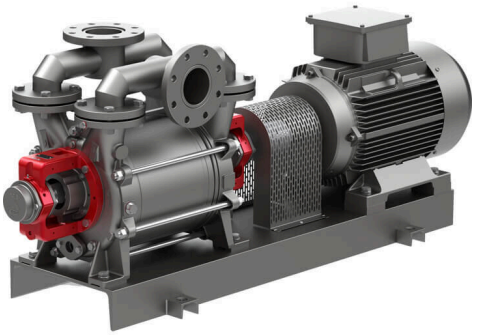

Description

Einstufige Flüssigkeitsring-Vakuumpumpen, deren Vorteile die bewährte, robuste Bauweise umfassen.

Areas of use

>Distillations: Our pumps support efficient and reliable distillation processes. >Degassing systems: They ensure the effective removal of gases.

Technical data

Motor & drive

Degree of protection	IP 55

Electrics

Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84141089

Variants

Article number	Name	Flow rate	Suction pressure	Speed (max.)	Power output P_2 (max.)	Connection, inlet / suction side	Connection, discharge side
	VU 1200	1,173 m³/h	120 mbar	975 min-1	30 kW	DN125	DN125

Article number	Name	Flow rate	Suction pressure	Speed (max.)	Power output P_2 (max.)	Connection, inlet / suction side	Connection, discharge side
	VU 140	145 m³/h	150 mbar	1,450 min-1	4 kW	DN40	DN40
	VU 1600	1,552 m³/h	120 mbar	975 min-1	45 kW	DN125	DN125
	VU 20	21 m³/h	150 mbar	2,800 min-1	1.1 kW	G 1 1/4"	G 1 1/4"
	VU 220	223 m³/h	150 mbar	1,450 min-1	5.5 kW	DN50	DN50
	VU 300	284 m³/h	150 mbar	1,450 min-1	7.5 kW	DN50	DN50
	VU 40	47 m³/h	150 mbar	2,800 min-1	1.5 kW	G 1 1/4"	G 1 1/4"
	VU 450	438 m³/h	150 mbar	1,450 min-1	11 kW	DN65	DN65
	VU 500	510 m³/h	120 mbar	1,450 min-1	15 kW	DN100	DN100
	VU 600	669 m³/h	120 mbar	1,450 min-1	18.5 kW	DN100	DN100
	VU 80	80 m³/h	150 mbar	1,450 min-1	2.1 kW	DN40	DN40
	VU 800	863 m³/h	120 mbar	975 min-1	22 kW	DN100	DN100