
VZ

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/vz-p53822

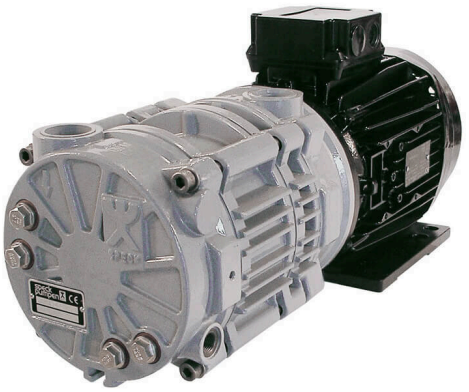

Description

Two-stage liquid ring vacuum pumps impress with their quiet and compact design, which characterizes this series.

Areas of use

>Sterilizers: Our pumps ensure efficient and reliable sterilization. >Degassing systems: They ensure the effective removal of gases.

Technical data

Hydraulic power

Suction pressure	33 mbar

Motor & drive

Degree of protection	IP 55

Electrics

Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84141089

Variants

Article number	Name	Flow rate	Speed (max.)	Power output P_2 (max.)	Connection, inlet / suction side	Connection, discharge side
	VZ 110	107 m³/h	1,450 min-1	3 kW	DN 40	DN 40
	VZ 140	145 m³/h	1,450 min-1	4 kW	DN 40	DN 40
	VZ 180	186 m³/h	1,450 min-1	5.5 kW	DN 40	DN 40
	VZ 30	30 m³/h	2,850 min-1	1.1 kW	G 1"	G 1"
	VZ 50	49 m³/h	2,850 min-1	1.5 kW	G 1"	G 1"