
TOEGI

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/toegi-p53825

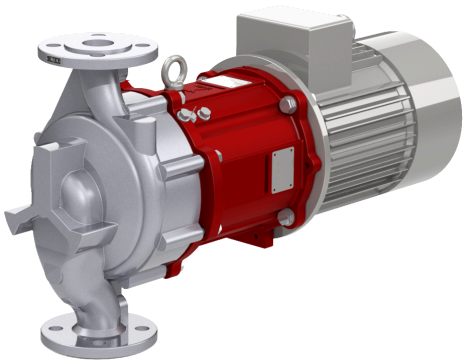

Description

Heat transfer pump with mechanical seal, suitable for oil applications up to 350 °C. The robust design ensures a long service life and minimal maintenance, enabling reliable sealing even at high temperatures and demanding operating conditions.

Areas of use

>Heating systems: Our pumps ensure efficient and reliable heating. >Industrial temperature control systems: They ensure precise temperature control in industrial processes.

Technical data

Hydraulic power

Operating pressure max.	16 bar

Motor & drive

Speed (max.)	1.45 – 2.9 min-1
Degree of protection	IP 55

Electrics

Input voltage	400 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84137059

Variants

Article number	Name	Flow rate	Head (min.)	Power output P_2 (max.)	Connection, inlet / suction side	Connection, discharge side
	TOEGI040160	42 m³/h	46 mWS	11 kW	DN 40	DN 40
	TOEGI040200	45 m³/h	57 mWS	11 kW	DN 40	DN 40
	TOEGI050200	75 m³/h	56 mWS	15 kW	DN 50	DN 50
	TOEGI065200	93 m³/h	58 mWS	22 kW	DN 65	DN 65